



SEALEZE® Building Envelope Solutions

SEALEZE.com

Why SEALEZE® brushes are better

They don't just look good, they're better than the any other brush in the market.

Easy to Install

Therm-L-Brush aluminum holders come slotted with self-drilling TEK-type screws for quick, low-cost installation. When using double backed tape, installation takes seconds.

UL 3-Hour Fire Door Rated

SEALEZE® Nylon Therm-L-Brush up to 4 inches long are UL labeled (upon request) for use on 3-hour fire doors.

Lasts the Longest

Not only does it conform to all surface contours for a complete seal, but it won't tear like solid sealing materials can. Therm-L-Brush can last the life of the door and rarely needing to be replaced. The nylon holds up to the weather like nothing else.

Works in Extreme Temperatures


In the coldest climates, where vinyl and other materials can freeze and become brittle, **SEALEZE®** Therm-L-Brush will stay flexible.

Keeps Out Pests

It's ideal for sealing doors to light-sensitive areas and for use around warehouses and food preparation areas to keep out pests. With no light visible, there is less of a chance of attracting pests.

Blocks Sound

Independent laboratory tests show **SEALEZE®** Therm-L-Brush effectively reduces sounds that can come through the openings around interior and exterior doorways.

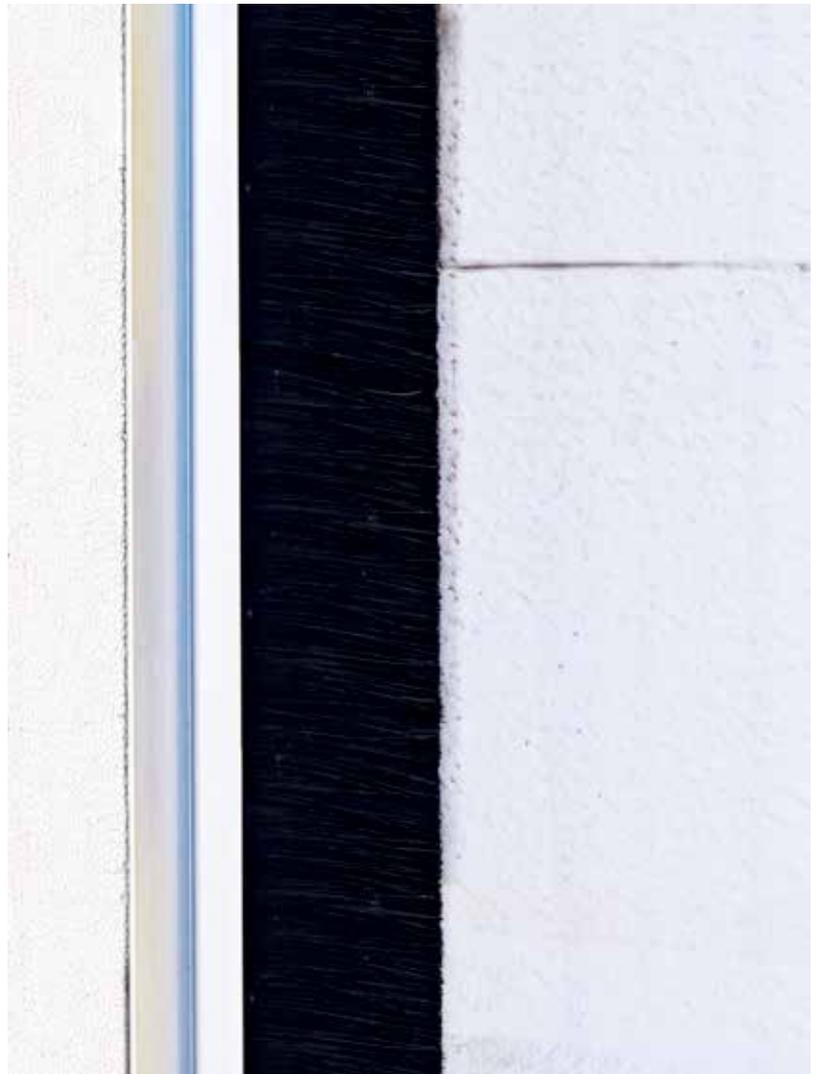

Providing solutions for your applications

Building Envelope provides an attractive and effective solution to gaps for any door. And, **SEALEZE**® AstraSweep corner seals when used with **SEALEZE**® door sweeps and astragal seals, provide a more complete seal by closing the gap between the sweep and astragal.


Any Door

Most Building Envelope products are stocked in kits for standard size entrance doors. Kits are available for sweeps, door header and jamb seals, astragal seals and AstraSweep kits which include astragal, sweep and corner seals for a more complete seal around double doors.

A Complete Seal For Any Opening


For special door sizes or configurations, **SEALEZE**® will custom-cut weatherseal to your specifications and package in clear poly bags.

1. Astragal Seals
2. Header and Jamb Seals
3. Door Bottom Seals (Door Sweeps)
4. Astra Sweep Corner Seals

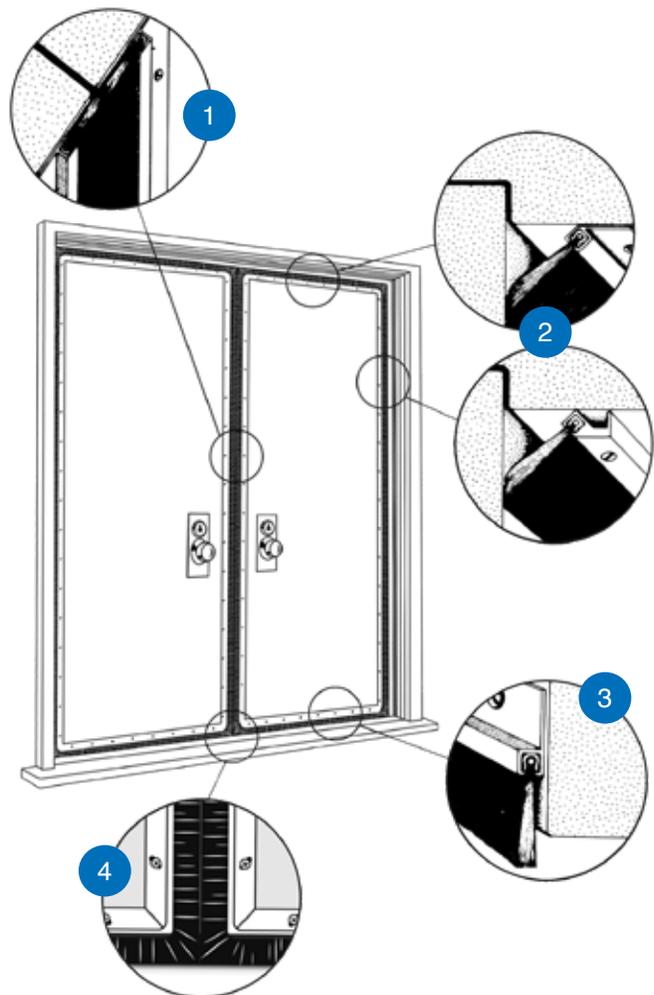

Door Sweeps

Building Envelopes are ideal for sealing the irregular surfaces of thresholds at door bottoms, and conforming to the surface while not impairing the door's movements. Select the right brush and holder, based on the size of the gap to be sealed and the desired appearance of the holder.

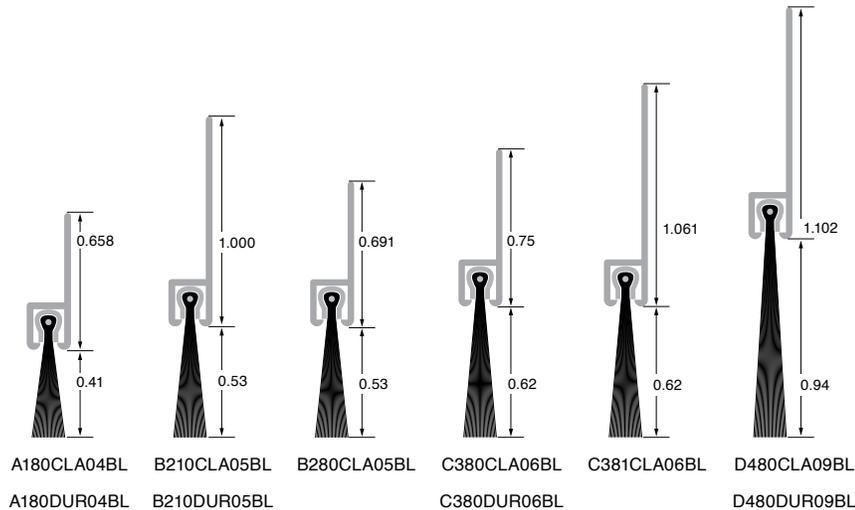

SEALEZE® Nylon
Therm-L-Brush up to 4"
long are UL labeled for use
on 3-hour fire doors.


Product Code	Brush Length	Holder Length	Stock Length (feet)
A180CLA04BL	0.41	0.658	7, 8, 10
A180DUR04BL	0.41	0.658	7, 10
B210CLA05BL	0.53	1.000	3, 7, 10
B210DUR05BL	0.53	1.000	10
B280CLA05BL	0.53	0.691	10
C380CLA06BL	0.62	0.750	3, 7, 10
C380DUR06BL	0.62	0.750	10
C381CLA06BL	0.62	1.061	8, 10
D480CLA09BL	0.94	1.102	3, 7, 8, 9, 10, 12
D480DUR09BL	0.94	1.102	8, 10, 12

How to Select the Right Door Sweep

What size gap are you sealing?	Look at these items:
Up to 3/8"	Starting with the letter "A"
Up to 1/2"	Starting with the letter "B"
Up to 9/16"	Starting with the letter "C"
Up to 1"	Starting with the letter "D"
What color should the holder be?	Look at these items:
Clear Satin (silver in color)	Items with the letters "CLA" in the middle
Bronze (dark brown in color)	Items with the letters "DUR" in the middle

Door Sweep Kits

Aluminum door sweeps in both clear and dark bronze finish with black brush are the perfect complement to their corresponding door jamb seals. The aluminum holders are pre-slotted for ease of installation and sweeps are prepackaged with fasteners for 3, 3.5 and 4 foot doors.

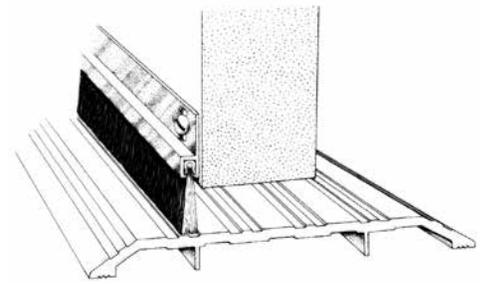


Kit Product Code	Brush Length	Door Bottom Width (feet)
A180CLA04BL3	0.41	3
A180CLA04BL3.5	0.41	3.5
A180CLA04BL4	0.41	4
A180DUR04BL3	0.41	3
A180DUR04BL3.5	0.41	3.5
A180DUR04BL4	0.41	4
B210CLA05BL3	0.53	3
B210CLA05BL3.5	0.53	3.5
B210CLA05BL4	0.53	4
B210DUR05BL3	0.53	3
B210DUR05BL3.5	0.53	3.5
B210DUR05BL4	0.53	4
C380CLA06BL3	0.62	3
C380CLA06BL3.5	0.62	3.5
C380CLA06BL4	0.62	4
C380DUR06BL3	0.62	3
C380DUR06BL3.5	0.62	3.5
C380DUR06BL4	0.62	4
D480CLA09BL3	0.94	3
D480CLA09BL3.5	0.94	3.5
D480CLA09BL4	0.94	4
D480DUR09BL3	0.94	3
D480DUR09BL3.5	0.94	3.5
D480DUR09BL4	0.94	4

Let us help! For questions, assistance & samples:

800.446.7325 • SEALEZE.com • SEALEZEorders@SEALEZE.com

Jamb Seals

Aluminum door jamb holders are available in clear (silver color) and dark bronze (brown color) finishes. These holders are available for doors 3, 4, and 6 feet wide by 7 feet high. Kits come with screw slots for after-installation adjustment or with counter-sunk holes for a neat, flush finish.

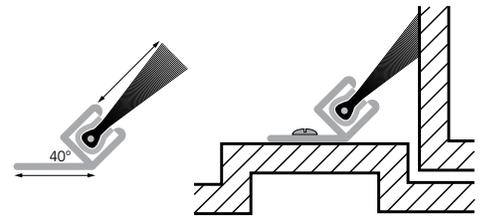

Product Code	Brush Length	Holder Length	Holder Angle	Finish Color	Stock (feet)
JR40CLA04BL	0.41	0.375	40°	Clear Anodized	7, 8, 9, 10
J135CLA04BL	0.41	0.450	35°	Clear Anodized	7, 10
J135DUR04BL	0.41	0.450	35°	Dark Bronze	10
J140CLA04BL	0.41	0.750	40°	Clear Anodized	7, 9, 10
J140DUR04BL	0.41	0.750	40°	Dark Bronze	7, 10



UL listed jamb kits provide reliable seals without restricting automatic door closers. Tested for 2,000,000 cycles by Scovill Laboratories, these high-quality brush seals provide long-lasting, cost-effective service.



Selecting the Right Door Jamb

What color do you need?	Select:
Clear Satin (silver in color)	Items with letters "CLA" in the middle
Bronze (dark brown in color)	Items with the letters "DUR" in the middle
What size is the door?	Select:
3' x 7'	Item with product code ending in 17
4' x 7'	Item with product code ending in 18
6' x 7'	Item with product code ending in 20
What style holder should be used?	
It's strictly a matter of preference. Our JR40 extrusion is the smallest, offering a .375" flange at a 40° angle. The J140 extrusion is slightly larger with a .75" flange at a 40° angle while the J135 extrusion brings a more "finished" look to your jambs with a .45" flange at a 35° angle.	

Jamb Seals Kits

Aluminum door jamb holders are available in clear (silver color) and dark bronze (brown color) finishes. These holders are available for doors 3, 4, and 6 feet wide by 7 feet high. Kits come with screw slots for after-installation adjustment or with counter-sunk holes for a neat, flush finish. JR40 and J140 kits come with screw slots for after-installation adjustments. J135 kits have counter-sunk screw holes for a neat, flush finish. Fasteners and installation instructions are provided with all kits. Brush lengths also available in 0.75 and 1.00 inches.


Product Code	Brush Length	Door Size (feet)	Finish Color
JR40CLA04BL17	0.41	3 x 7	Clear Anodized
JR40CLA04BL18	0.41	4 x 7	Clear Anodized
JR40CLA04BL20	0.41	6 x 7	Clear Anodized
J135CLA04BL17	0.41	3 x 7	Clear Anodized
J135CLA04BL18	0.41	4 x 7	Clear Anodized
J135CLA04BL20	0.41	6 x 7	Clear Anodized
J135DUR04BL17	0.41	3 x 7	Dark Bronze
J135DUR04BL18	0.41	4 x 7	Dark Bronze
J135DUR04BL20	0.41	6 x 7	Dark Bronze
J140CLA04BL17	0.41	3 x 7	Clear Anodized
J140CLA04BL18	0.41	4 x 7	Clear Anodized
J140CLA04BL20	0.41	6 x 7	Clear Anodized
J140DUR04BL17	0.41	3 x 7	Dark Bronze
J140DUR04BL18	0.41	4 x 7	Dark Bronze
J140DUR04BL20	0.41	6 x 7	Dark Bronze

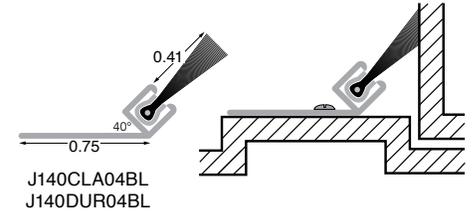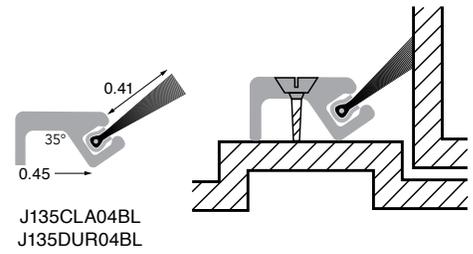

Let us help! For questions, assistance & samples:
 800.446.7325 • SEALEZE.com • SEALEZEorders@SEALEZE.com

Double Door Seals for Wood and Metal Doors

Therm-L-Brush is perfect for double door applications when closing the gap between two doors is necessary. Fourteen and sixteen foot standard kits, available in our A180 or C380 product codes, come poly-bagged to include fasteners and installation instructions for wood doors. Metal doors are sealed just as quickly when our weatherseals are applied by using double backed tape.

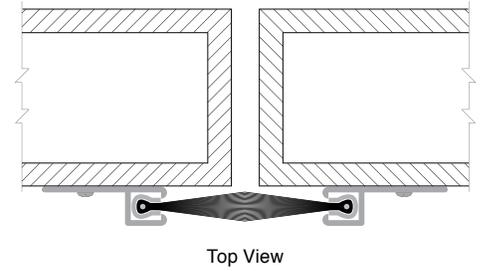

Double Door Seals

Product Code	Brush Length	Straight Holder Length	Stock Length (feet)
A180CLA04BL	0.41	0.658	7, 8
A180DUR04BL	0.41	0.658	7, 8
C380CLA06BL	0.62	0.750	7, 8
C380DUR06BL	0.62	0.750	7, 8


Double Door Kits

Kit Product Code	Brush Length	Door Height (feet)
A180CLA04BL14	0.41	7
A180DUR04BL14	0.41	7
C380CLA06BL14	0.62	7
C380DUR06BL14	0.62	7
A180CLA04BL16	0.41	8
A180DUR04BL16	0.41	8
C380CLA06BL16	0.62	8
C380DUR06BL16	0.62	8

AstraSweep Kits

SEALEZE® AstraSweep corner seals seal the gap between the double door seal and the door sweep. AstraSweep Kits include two corner seals, two door sweeps and two astragal seals—all the materials necessary to seal the inside (gaps up to 1 inch) and bottoms of a double door. Holders are pre-slotted for easy installation.

Kit Product Code	Door Size (W x H, feet)	Finish Color
C380CLA06BL67	6 x 7	Clear Anodized
C380DUR06BL67	6 x 7	Dark Bronze
C380CLA06BL68	6 x 8	Clear Anodized
C380DUR06BL68	6 x 8	Dark Bronze
C380CLA06BL77	7 x 7	Clear Anodized
C380DUR06BL77	7 x 7	Dark Bronze
C380CLA06BL78	7 x 8	Clear Anodized
C380DUR06BL78	7 x 8	Dark Bronze
C380CLA06BL87	8 x 7	Clear Anodized
C380DUR06BL87	8 x 7	Dark Bronze
C380CLA06BL88	8 x 8	Clear Anodized
C380DUR06BL88	8 x 8	Duranodic

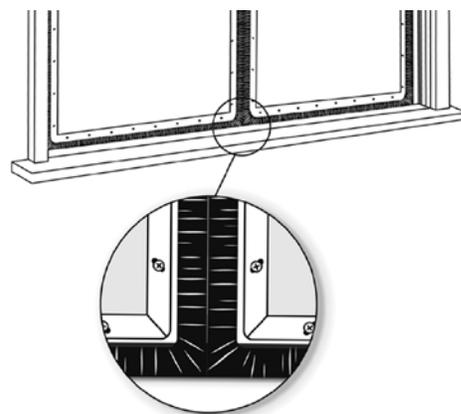

AstraSweep (corner seal only)

Includes 2 seals for size “C” door sweep and astragal seal.



Kit Product Code	Finish Color
C38090CLA06BLKP	Clear Anodized
C38090DUR06BLKP	Dark Bronze

Let us help! For questions, assistance & samples:


800.446.7325 • SEALEZE.com • SEALEZEorders@SEALEZE.com

Building Envelopes for Overhead Doors

To minimize air and dirt infiltration around rolling steel, sectional and sliding overhead doors, install the best weatherseals available. **SEALEZE**® Building Envelope's unique property of conforming to irregular surfaces provides the most effective sealing. Thousands of filaments form a solid wall for a complete weather-tight seal without impairing door movement. Order with slots and screws, or with easy-to-install double backed tape.

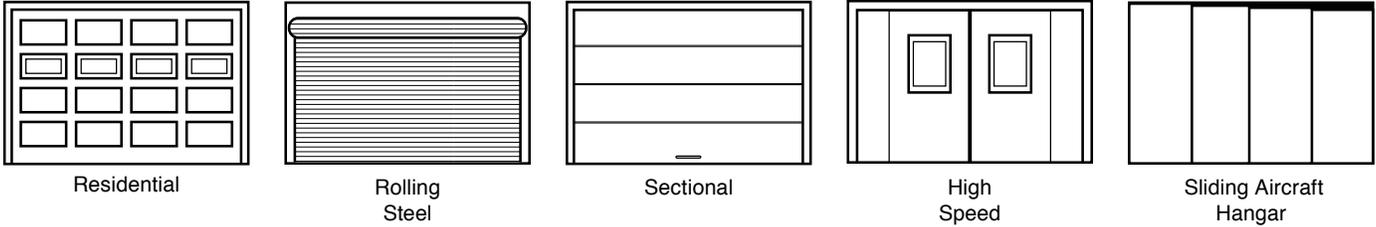


Side View of Header Seal
Use angled holder so top of door closes into brush for tight seal.




Side View of Header Seal
Straight holder mounts on inside of door or mounts to header exterior. Brush outlasts the vinyl flap that comes with most installations and keeps out birds, bats, and insects.




Top View of Jamb Seal
Use angled holder on jambs.




Top View of Jamb Seal
Use angled holder on jambs. Brush fills all corrugations for complete seal.




Top View of Jamb Seal
Angled holder can be mounted on inside so brush seals against edge of door. Inside mount hides seal and prevents potential impact damage. Use double backed tape for easiest installation.



Side View of Door Bottom Seal
Mount angled holder across door bottom so brush flexes on to pavement to complete all around sealing of door.






Top View of Jamb Seal
Behind-wall installation: Use reverse angled holder on guides.

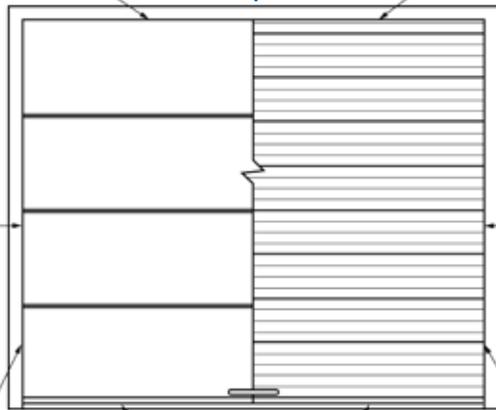

Light-duty

Light-duty brush seals are ideal for residential and commercial sectional doors. JR40 and J140 are available in kits for 9 x 7 foot and 16 x 7 foot garage doors.

Product Code	Brush Length	Holder Length	Holder Angle
JR40CLA08BL	0.75	0.375	40°
JR40CLA10BL	1.00	0.375	40°
J140CLA08BL	0.75	0.750	40°
J140DUR08BL	0.75	0.750	40°
J140CLA10BL	1.00	0.750	40°
J140DUR10BL	1.00	0.750	40°
B230CLA10BL	1.00	0.862	30°
B210CLA10BL	1.00	1.000	180°
B210DUR10BL	1.00	1.000	180°
C380CLA10BL	1.00	0.750	180°
C380DUR10BL	1.00	0.750	180°

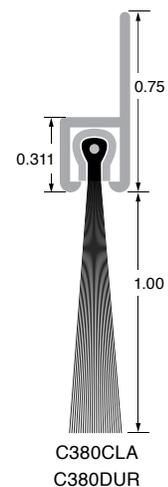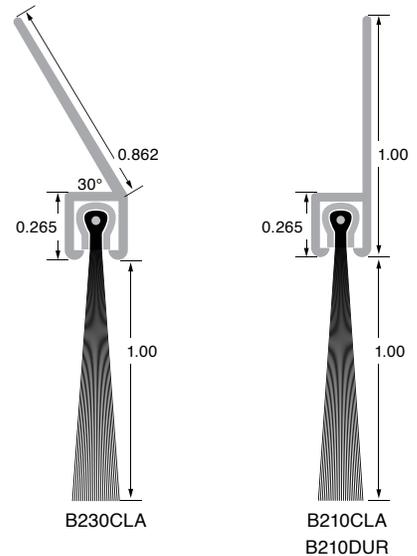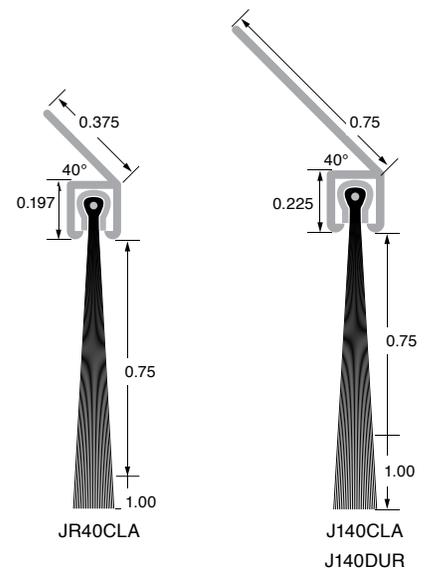


Let us help! For questions, assistance & samples:

800.446.7325 • SEALEZE.com • SEALEZEorders@SEALEZE.com

Standard-duty

Standard-duty brush seals are the perfect seal for all sectional, rolling steel, and other service doors. **SEALEZE**® "D" series is synonymous with quality, energy-saving and value. Available in brush lengths from 1 to 3 inches.

Product Code	Brush Length	Holder Length	Holder Angle
D480CLA09BL	0.94	1.102	180°
D480DUR09BL	0.94	1.102	180°
D480CLA12BL	1.19	1.102	180°
D480DUR12BL	1.19	1.102	180°
D480CLA16BL	1.61	1.102	180°
D480DUR16BL	1.61	1.102	180°
D480CLA20BL	2.00	1.102	180°
D480DUR20BL	2.00	1.102	180°
D480CLA30BL	3.00	1.102	180°
D480DUR30BL	3.00	1.102	180°
D482CLA09BL	0.94	1.891	180°
D482CLA12BL	1.19	1.891	180°
D482CLA16BL	1.61	1.891	180°
D482CLA20BL	2.00	1.891	180°
D482CLA30BL	3.00	1.891	180°
D483CLA09BL	0.94	3.391	180°
D483CLA12BL	1.19	3.391	180°
D483CLA16BL	1.61	3.391	180°
D483CLA20BL	2.00	3.391	180°
D483CLA30BL	3.00	3.391	180°
D445CLA09BL	0.94	0.844	45°
D445DUR09BL	0.94	0.844	45°
D445CLA12BL	1.19	0.844	45°
D445DUR12BL	1.19	0.844	45°
D445CLA16BL	1.61	0.844	45°
D445DUR16BL	1.61	0.844	45°
D445CLA20BL	2.00	0.844	45°
D445DUR20BL	2.00	0.844	45°
D445CLA30BL	3.00	0.844	45°
D445DUR30BL	3.00	0.844	45°
D45XCLA09BL	0.94	1.890	45°
D45XCLA12BL	1.19	1.890	45°
D45XCLA16BL	1.61	1.890	45°
D45XCLA20BL	2.00	1.890	45°
D45XCLA30BL	3.00	1.890	45°
D45RCLA09BL	0.94	1.000	45° REV
D45RCLA12BL	1.19	1.000	45° REV
D45RCLA16BL	1.61	1.000	45° REV
D45RCLA20BL	2.00	1.000	45° REV
D45RCLA30BL	3.00	1.000	45° REV

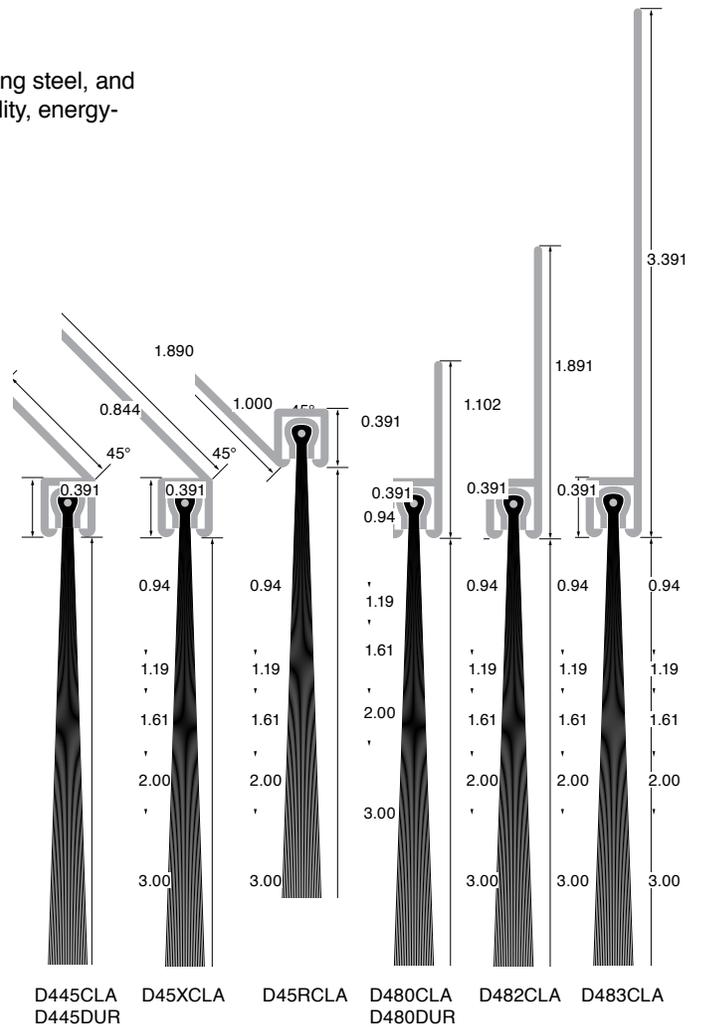


SEALEZE® nylon Therm-L-Brush up to 4 inches long are UL labeled for use on 3-hour fire doors.

Heavy-duty

SEALEZE® “F” series brush are a cost-effective solution in many applications where the heaviest density of our “G” series brush isn’t needed. Available in lengths up to 5 inches, F-series brushes can seal gaps in many large door applications.

Product Code	Brush Length	Holder Length	Holder Angle
F580CLA15BL	1.50	1.00	180°
F580CLA20BL	2.00	1.00	180°
F580CLA25BL	2.50	1.00	180°
F580CLA30BL	3.00	1.00	180°
F580CLA40BL	4.00	1.00	180°
F580CLA50BL	5.00	1.00	180°
F582CLA15BL	1.50	1.50	180°
F582CLA20BL	2.00	1.50	180°
F582CLA25BL	2.50	1.50	180°
F582CLA30BL	3.00	1.50	180°
F582CLA40BL	4.00	1.50	180°
F545CLA15BL	1.50	1.50	45°
F545CLA20BL	2.00	1.50	45°
F545CLA25BL	2.50	1.50	45°
F545CLA30BL	3.00	1.50	45°
F545CLA40BL	4.00	1.50	45°
F545CLA50BL	5.00	1.50	45°
F590CLA15BL	1.50	1.47	90°
F590CLA20BL	2.00	1.47	90°
F590CLA25BL	2.50	1.47	90°
F590CLA30BL	3.00	1.47	90°
F590CLA40BL	4.00	1.47	90°
F590CLA50BL	5.00	1.47	90°

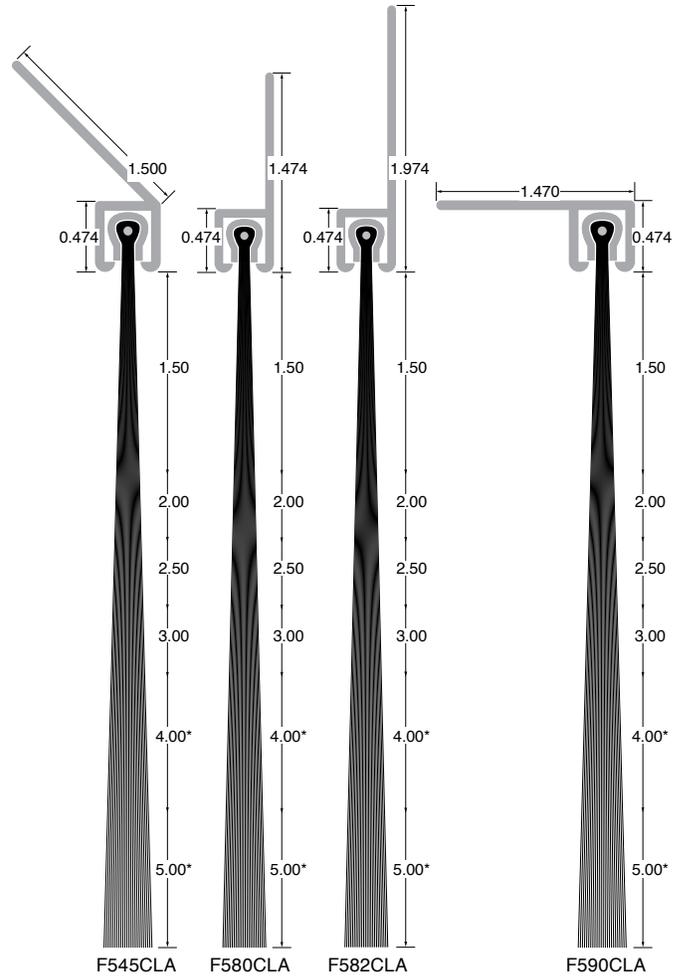

*UL only applies to brush up to 4 inches.




SEALEZE® nylon Therm-L-Brush up to 4 inches long are UL labeled for use on 3-hour fire doors.

Let us help! For questions, assistance & samples:
 800.446.7325 • SEALEZE.com • SEALEZEorders@SEALEZE.com

Heavy-duty

The heaviest brush seals available, **SEALEZE**'s "G" series brushes seal out the elements around large industrial rolling steel doors, sectional doors, and other large service doors, including aircraft hangar doors. Available in brush lengths up to 7 inches. UL rating on all brushes up to 4 inches in length.

Product Code	Brush Length	Holder Length	Holder Angle
G680CLA18BL	1.75	1.312	180°
G680CLA25BL	2.53	1.312	180°
G680CLA30BL	3.00	1.312	180°
G680CLA40BL	4.00	1.312	180°
G680CLA50BL	5.00	1.312	180°
G680CLA60BL	6.00	1.312	180°
G680CLA70BL	7.00	1.312	180°
G682CLA18BL	1.75	2.00	180°
G682CLA25BL	2.53	2.00	180°
G682CLA30BL	3.00	2.00	180°
G682CLA40BL	4.00	2.00	180°
G682CLA50BL	5.00	2.00	180°
G682CLA60BL	6.00	2.00	180°
G682CLA70BL	7.00	2.00	180°
G685CLA18BL	1.75	5.470	180°
G685CLA25BL	2.53	5.470	180°
G685CLA30BL	3.00	5.470	180°
G685CLA40BL	4.00	5.470	180°
G685CLA50BL	5.00	5.470	180°
G685CLA60BL	6.00	5.470	180°
G685CLA70BL	7.00	5.470	180°
GG680CLA18BL	1.75	1.778	180°
GG680CLA25BL	2.53	1.778	180°
GG680CLA30BL	3.00	1.778	180°
GG680CLA40BL	4.00	1.778	180°
GG680CLA50BL	5.00	1.778	180°
GG680CLA60BL	6.00	1.778	180°
GG680CLA70BL	7.00	1.778	180°
G645CLA18BL	1.75	1.000	45°
G645CLA25BL	2.53	1.000	45°
G645CLA30BL	3.00	1.000	45°
G645CLA40BL	4.00	1.000	45°
G645CLA50BL	5.00	1.000	45°
G645CLA60BL	6.00	1.000	45°
G645CLA70BL	7.00	1.000	45°

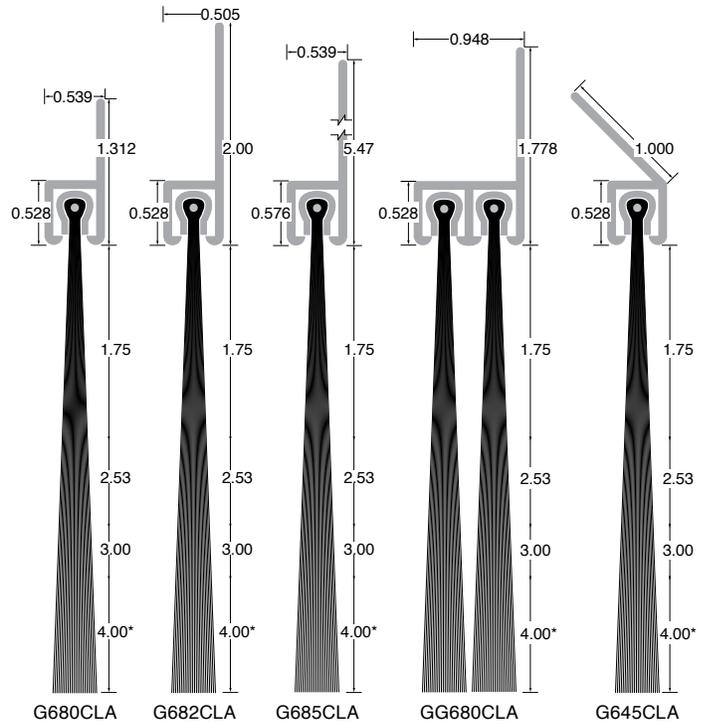

*Brush available up to 7 inch, UL only applies to brush up to 4 inch.




SEALEZE® nylon Therm-L-Brush up to 4 inches long are UL labeled for use on 3-hour fire doors.

Plastic Guide Seal for Rolling Steel Door

Easy installation. Just slide extrusion over guide and let the brush conform to all surface irregularities. Extrusion fits 3/16 inch guides. Use alone or with epoxy for additional hold.


Product Code	Brush Length	Holder Length	Holder Angle
DP40PVC09BL	0.94	.75	40°
DP40PVC12BL	1.19	.75	40°
DP40PVC16BL	1.61	.75	40°
DP40PVC20BL	2.00	.75	40°
DP40PVC30BL	3.00	.75	40°

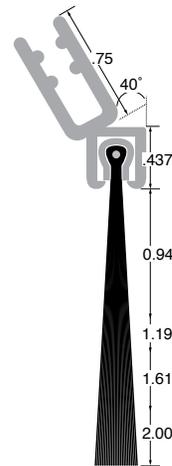

Reverse Angle Clip-On

For use on commercial sectional doors. Dual durometer construction provides a hard vinyl holding section and a flexible flap. Use in situations where price is a key consideration. Fits 1/8 inch guides. Sold in cartons of 200 feet.

Product Code	Color
RG15GRYVNYL	Gray
RG15W HTVNYL	White

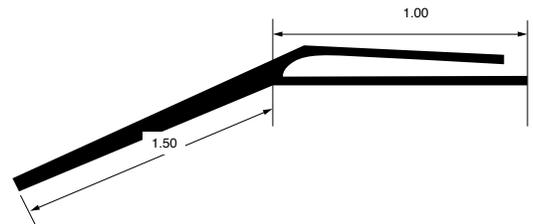

Let us help! For questions, assistance & samples:

800.446.7325 • SEALEZE.com • SEALEZEorders@SEALEZE.com

ProSeal

As a low-cost alternative to Therm-L-Brush, we also stock a line of polypropylene brushes. ProSeal brush lengths are from 1 inch to 4 inches and fit nicely into any of our "C" or "D" series holders. See chart below for holder and brush combinations available for ProSeal. Also available is a 1-3/8 inch gray vinyl flap. ProSeal brushes are available in a range of stock lengths, depending on product code.

ProSeal For Mini-Storage Doors

ProSeal size C brush and holders are an excellent choice for sealing corrugated roll-up doors in mini-storage units. It is available with straight exposed polypropylene filament in 1.0, 1.5, 2.0 and 3.0 inches for the best seal in these applications.


ProSeal for Aircraft Hangars/Barns

These crimped polypropylene brushes were developed for special use in sealing Aircraft Hangar Doors. This lower priced brush seals the large gaps usually associated with Hangar Doors while providing most of the advantages of nylon Therm-L-Brush. The brush can be combined with angled or straight holders and is available in brush trim lengths of 1.5, 2, 3, and 4 inches.

ProSeal or Therm-L-Brush

The sealing performance of Therm-L-Brush and ProSeal are comparable in most applications. Therm-L-Brush nylon filaments are more suitable for high-cycle applications. In lighter duty applications, the lower cost of ProSeal with polypropylene filaments can be considered.


Product Code	Brush Type	Brush Length	Holder Length	Holder Angle
C382CLA10BP	Straight Polypropylene	1.00	1.813	180°
C382CLA15BP	Straight Polypropylene	1.50	1.813	180°
C382CLA20BP	Straight Polypropylene	2.00	1.813	180°
C382CLA30BP	Straight Polypropylene	3.00	1.813	180°
C383CLA10BP	Straight Polypropylene	1.00	3.313	180°
C383CLA15BP	Straight Polypropylene	1.50	3.313	180°
C383CLA20BP	Straight Polypropylene	2.00	3.313	180°
C383CLA30BP	Straight Polypropylene	3.00	3.313	180°
C345CLA10BP	Straight Polypropylene	1.00	1.250	45°
C345CLA15BP	Straight Polypropylene	1.50	1.250	45°
C345CLA20BP	Straight Polypropylene	2.00	1.250	45°
C345CLA30BP	Straight Polypropylene	3.00	1.250	45°
D480CLA15PC	Crimped Polypropylene	1.50	1.102	180°
D480CLA20PC	Crimped Polypropylene	2.00	1.102	180°
D480CLA30PC	Crimped Polypropylene	3.00	1.102	180°
D480CLA40PC	Crimped Polypropylene	4.00	1.102	180°
D482CLA15PC	Crimped Polypropylene	1.50	1.811	180°
D482CLA20PC	Crimped Polypropylene	2.00	1.811	180°
D482CLA30PC	Crimped Polypropylene	3.00	1.811	180°
D482CLA40PC	Crimped Polypropylene	4.00	1.811	180°
D483CLA15PC	Crimped Polypropylene	1.50	3.391	180°
D483CLA20PC	Crimped Polypropylene	2.00	3.391	180°
D483CLA30PC	Crimped Polypropylene	3.00	3.391	180°
D483CLA40PC	Crimped Polypropylene	4.00	3.391	180°
D445CLA15PC	Crimped Polypropylene	1.50	0.844	45°
D445CLA20PC	Crimped Polypropylene	2.00	0.844	45°
D445CLA30PC	Crimped Polypropylene	3.00	0.844	45°
D445CLA40PC	Crimped Polypropylene	4.00	0.844	45°
D45XCLA15PC	Crimped Polypropylene	1.50	1.890	45°
D45XCLA20PC	Crimped Polypropylene	2.00	1.890	45°
D45XCLA30PC	Crimped Polypropylene	3.00	1.890	45°
D45XCLA40PC	Crimped Polypropylene	4.00	1.890	45°
D45RCLA15PC	Crimped Polypropylene	1.50	1.000	45 REV°
D45RCLA20PC	Crimped Polypropylene	2.00	1.000	45 REV°
D45RCLA30PC	Crimped Polypropylene	3.00	1.000	45 REV°
D45RCLA40PC	Crimped Polypropylene	4.00	1.000	45 REV°
D490CLA15PC	Crimped Polypropylene	1.50	1.060	90°
D490CLA20PC	Crimped Polypropylene	2.00	1.060	90°
D490CLA30PC	Crimped Polypropylene	3.00	1.060	90°
D490CLA40PC	Crimped Polypropylene	4.00	1.060	90°

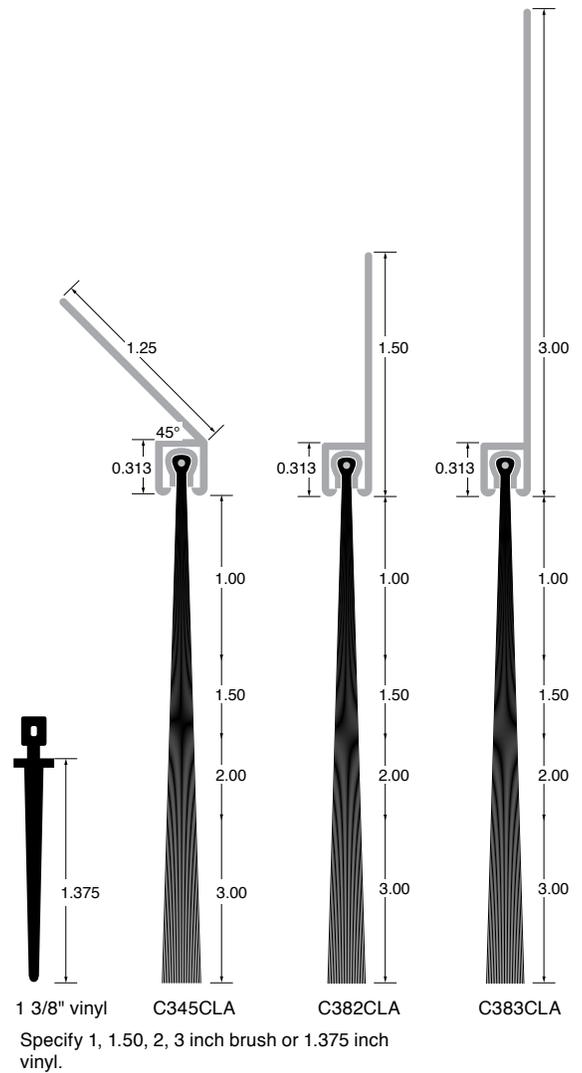

Let us help! For questions, assistance & samples:
 800.446.7325 • SEALEZE.com • SEALEZEorders@SEALEZE.com

Garage Door Threshold


- Solid black vinyl garage door threshold.
- Seals out the elements.
- Prevents driving rain and snow from backing into garage.
- Helps keep out dirt and leaves.
- Keeps door bottom from direct contact with concrete to prevent rust on metal doors and water damage on wood doors.
- Easy to install: Brush or wipe concrete clean and dry below door. Rough surface with wire brush for best adhesion. Apply adhesive per instructions on tube. One tube comes with every 20 feet of threshold. Installation works best when temperatures are above 50° F.



Adjustable Door Bottom

- Black Santoprene rubber.
- Won't tear or deform.
- Remains pliable in the coldest weather.
- Cushions door when closing.
- Two sizes available.
- Aluminum holder comes slotted, allowing for adjustments so it fits perfectly.

Product Code	X	Y	Z
ADB40BLK	1.75	1.00	1.5
ADB25BLK	1.375	1.00	1.0

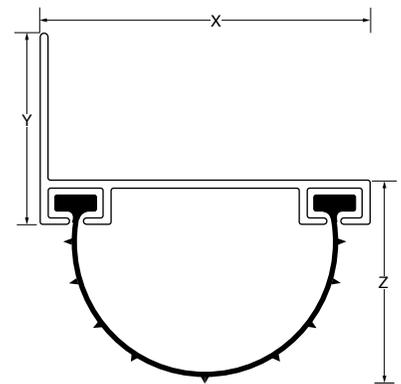


Dock Leveler Applications

Loading docks are prime areas for sealing with Building Envelope. Not only do the overhead doors allow air infiltration, but the dock levelers themselves can act as wind tunnels, robbing a building of its conditioned air supply. **SEALEZE**'s 90° flanges form the perfect fit for dock leveler seals and other special applications. Our "A" series is ideal for sealing small cracks, while the "G" series brush will cover the largest gaps.

Dock Leveler Seals

Product Code	Brush Length	Holder Length	Holder Angle
A190CLA04BL	0.41	0.55	90°
A190CLA10BL	1.00	0.55	90°
B290CLA05BL	0.53	0.69	90°
B290CLA10BL	1.00	0.69	90°
C390CLA06BL	0.62	0.96	90°
C390CLA10BL	1.00	0.96	90°
D490CLA09BL	0.94	1.06	90°
D490CLA12BL	1.19	1.06	90°
D490CLA16BL	1.61	1.06	90°
D490CLA20BL	2.00	1.06	90°
D490CLA30BL	3.00	1.06	90°
G690CLA18BL	1.75	1.38	90°
G690CLA25BL	2.53	1.38	90°
G690CLA30BL	3.00	1.38	90°
G690CLA40BL	4.00	1.38	90°

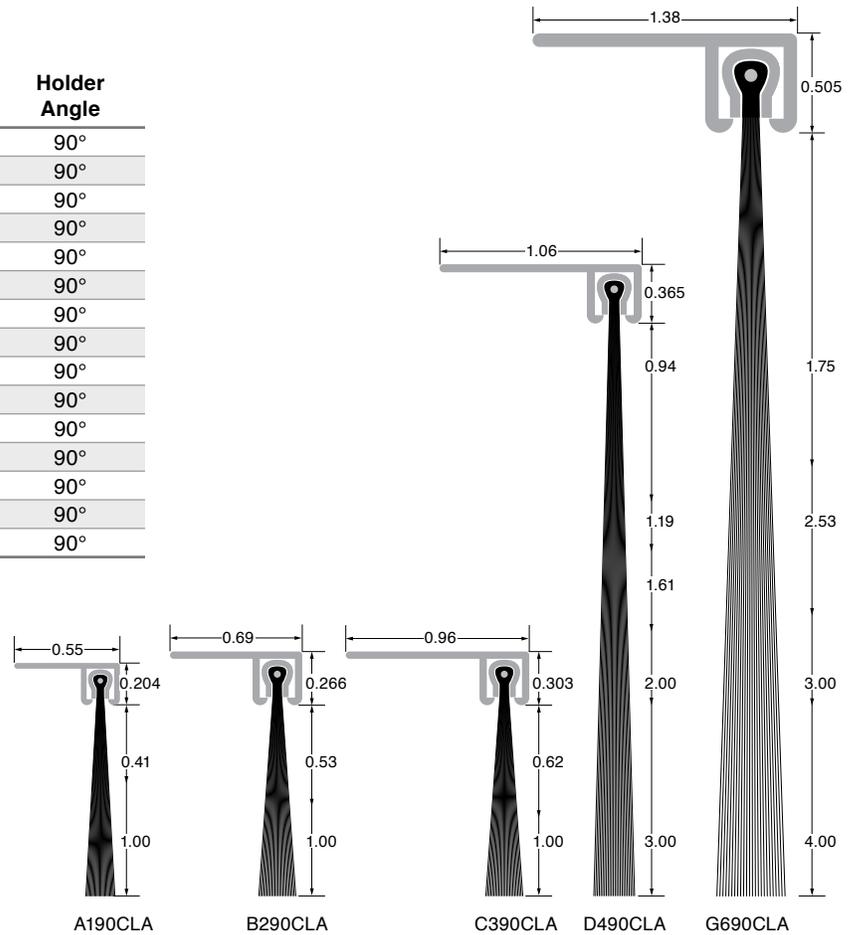


Let us help! For questions, assistance & samples:

800.446.7325 • SEALEZE.com • SEALEZEorders@SEALEZE.com

Weldable Dock Leveler Seals

Includes a steel holder that can be welded to the sides of the leveler. Kits includes two 96 sections. ($\pm .031$ standard tolerance)


Product Code	Holder Shape	Exposed Seal Length	Seal Type
BT90CLA05BLKIT8	T	0.500	Brush
BT90CLA10BLKIT8	T	1.000	Brush
BT90CLA14BLKIT8	T	1.375	Brush
BT90CS15PVCKIT8	T	1.375	PVC
BDL90CS05BLKIT8	L	0.500	Brush
BDL90CS10BLKIT8	L	1.000	Brush
BDL90CS14BLKIT8	L	1.375	Brush
DDL90CS09BLKIT8	L	1.000	Brush
DDL90CS12BLKIT8	L	1.200	Brush
DDL90CS16BLKIT8	L	1.600	Brush
DDL90CS20BLKIT8	L	2.000	Brush
DDL90CS30BLKIT8	L	3.000	Brush




L-Shaped Weldable Holder (BDL90CS)



L-Shaped Weldable Holder (DDL90CS)

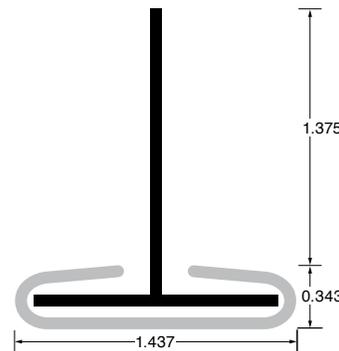

T-Shaped Holder (with PVC Seal) (BT90CS)



Brush in T-Shaped Holder (XTBT90CLA)

Hinge Seals

For the rear hinge of dock levelers. Choose from a 1 inch diameter neoprene "rope" seal or 2 x 3 inch foam stock.

Product Code	Description	Dimensions
HINGE-SEAL	Foam Seal	2" x 3" x 7'
HINGE-SEAL-ROD	Hinge Seal Stabilizer	3/8" x 7'
RS1ONEOPR	1" diameter Rope Seal	Cut-To-Order





SEALEZE.com